




Product Data Sheet

Cabinet Cooler

For pressurized enclosures

AVC-0000-001

AVC-0000-003

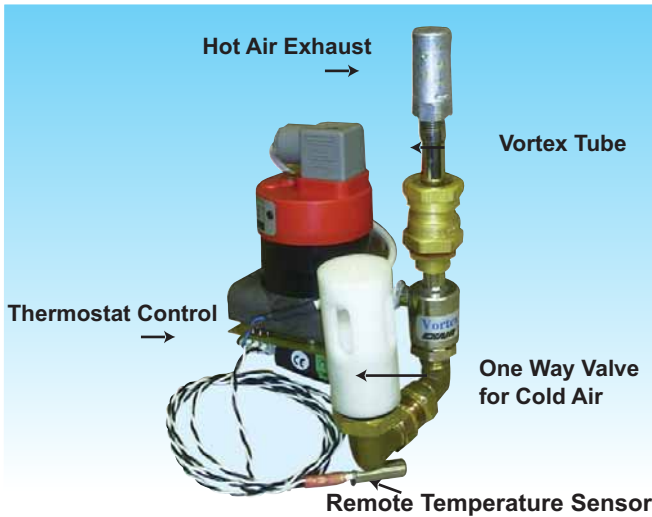

OVERVIEW

Expo Technologies Cabinet Cooler provides cooling for pressurized enclosures using compressed air. Cooling is required either to remove heat generated by the contents of the enclosure, or to compensate for high ambient temperatures.

SPECIFICATION

GENERAL LAYOUT OF CABINET COOLER

Power Supply:	AVC-0000-001 110-230 Vac. 50/60 Hz
	AVC-0000-003 24 Vdc.
Air Supply:	60 - 100 psi 4 - 7 barg 25 scfm, 708 NI/m, at 100 psi 7 barg
Cooling Capacity:	440 W at 100 psi 7 barg 1700 Btu/hr
Temperature Control:	Electronic = +/- 2°C
Maximum Air Outlet Temperature:	130°C / 266°F
Approximate Weight:	1.5 kg (4 pounds)

Suitable for T4 at 40°C / 104°F ambient. Cooler control must be housed in an IP40 enclosure or better.

FEATURES

- + One complete assembly, quick and easy to install.
- + Specifically designed to cool pressurized enclosures.
- + Unique one-way valve prevents leakage from the vortex exhaust when the cabinet cooler is not in operation.
- + For mounting in any wall of the pressurized enclosure.
- + The Cabinet Cooler has a remote electronic temperature sensor. This can be positioned as required to achieve maximum customer control.
- + Operates on 110-230 V AC after the purge has been completed and power has been applied to the enclosure. Option 24 Vdc.
- + Hot air exhaust is temperature limited. (T4)
- + No moving parts, giving high reliability.

SPECIFICATION

NOTE:

The Vortex Cooler assembly will operate in all orientations. However, the cold air out check valve must be rotated to the vertical position using an extension pipe if required.

Temperature sensor, 35mm (1 3/8") long by 10mm (13/32") Dia. is supplied and should be mounted at the top of the enclosure or the clients preferred position, using a 'P' clip.

www.expoworldwide.com




NFPA 496


Technical Specification

Cabinet Cooler

AVC-0000-001 and AVC-0000-003

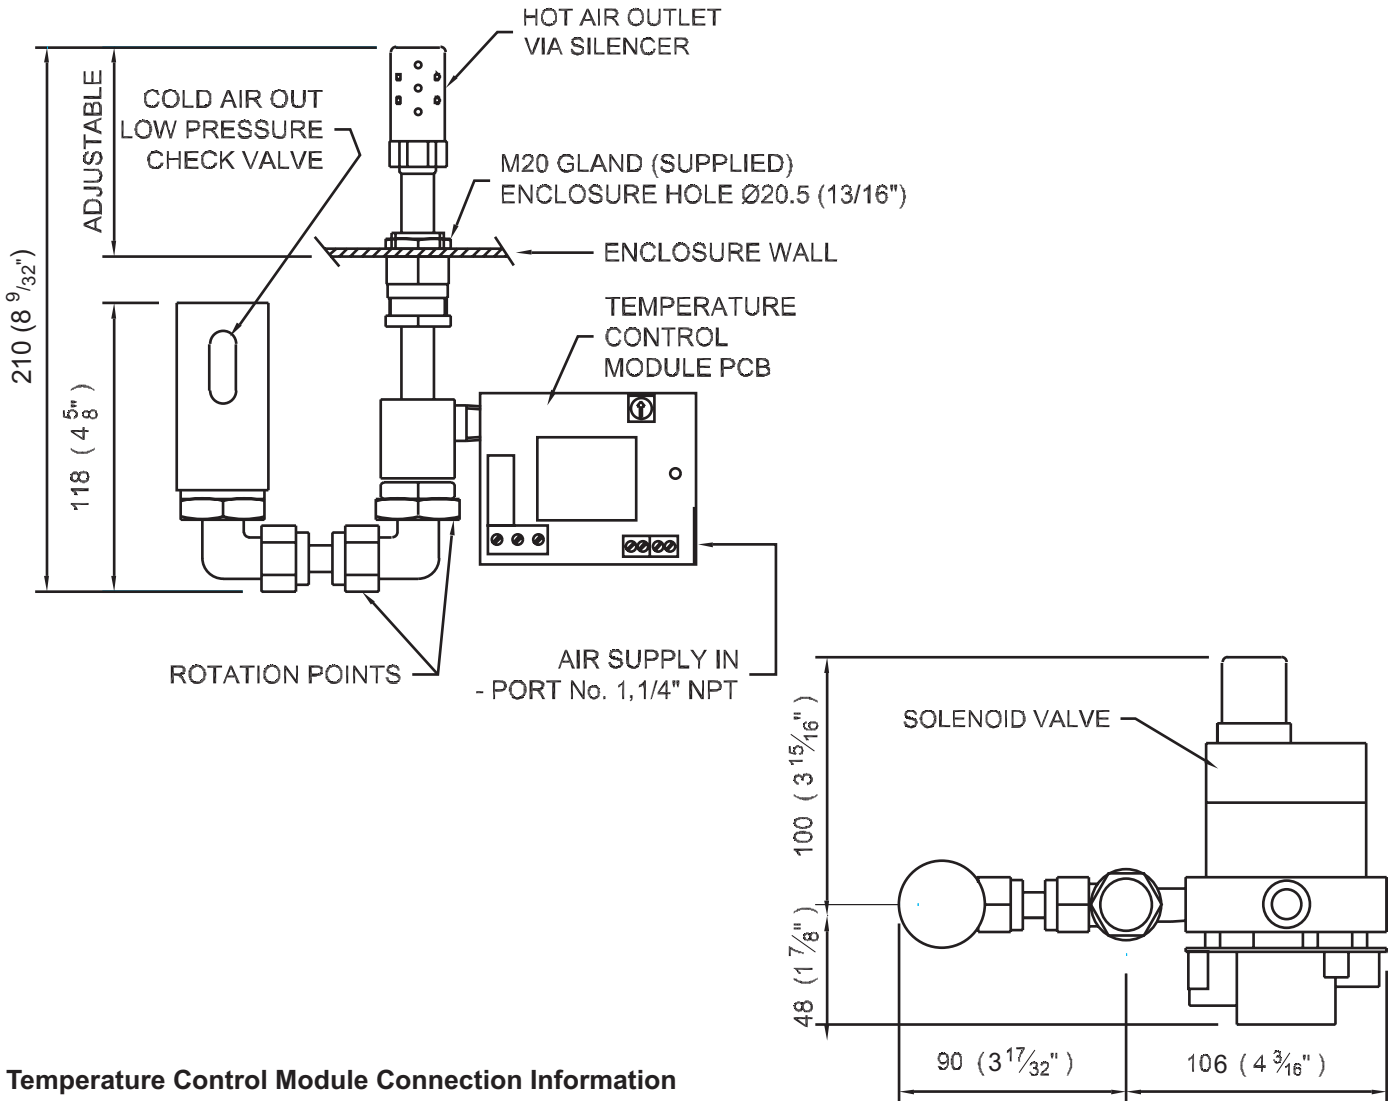

Temperature Control Module Connection Information

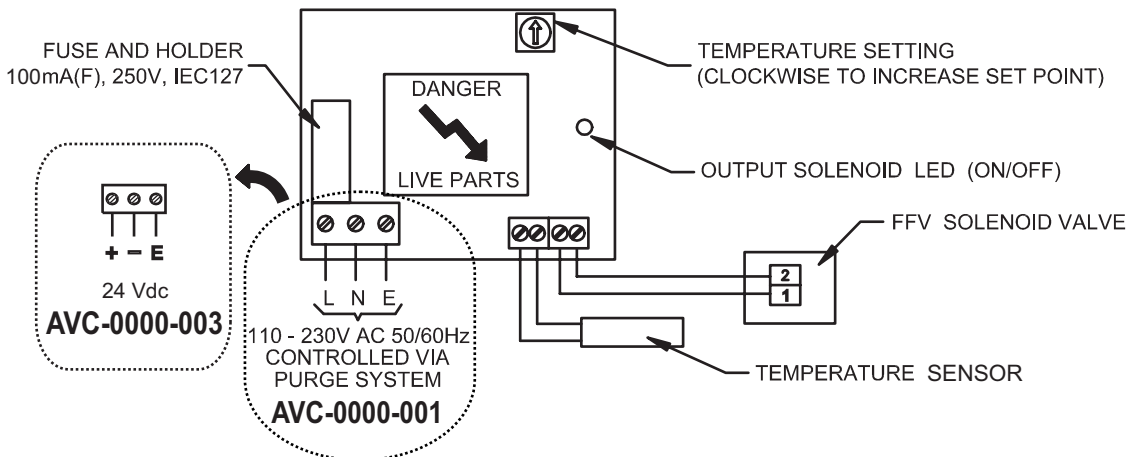

Expo Technologies Ltd
 Summer Road, Thames Ditton,
 Surrey, KT7 0RH, UK
 T +44 (0) 20 8398 8011
 F +44 (0) 20 8398 8014
 E sales@expoworldwide.com

Expo Technologies Inc
 9140 Ravenna Road, Unit 3,
 Twinsburg, 44087, OH, USA
 T 888-NFPA-496 (Toll Free)
 F +1 440 247 5409
 E sales.na@expoworldwide.com

www.expoworldwide.com

Expo Technologies reserve the right to amend data given here without prior notice.
 ©2003 Expo Technologies. Mini-Z-Purge™ is a trademark of Expo Technologies.